



SECTION A-A

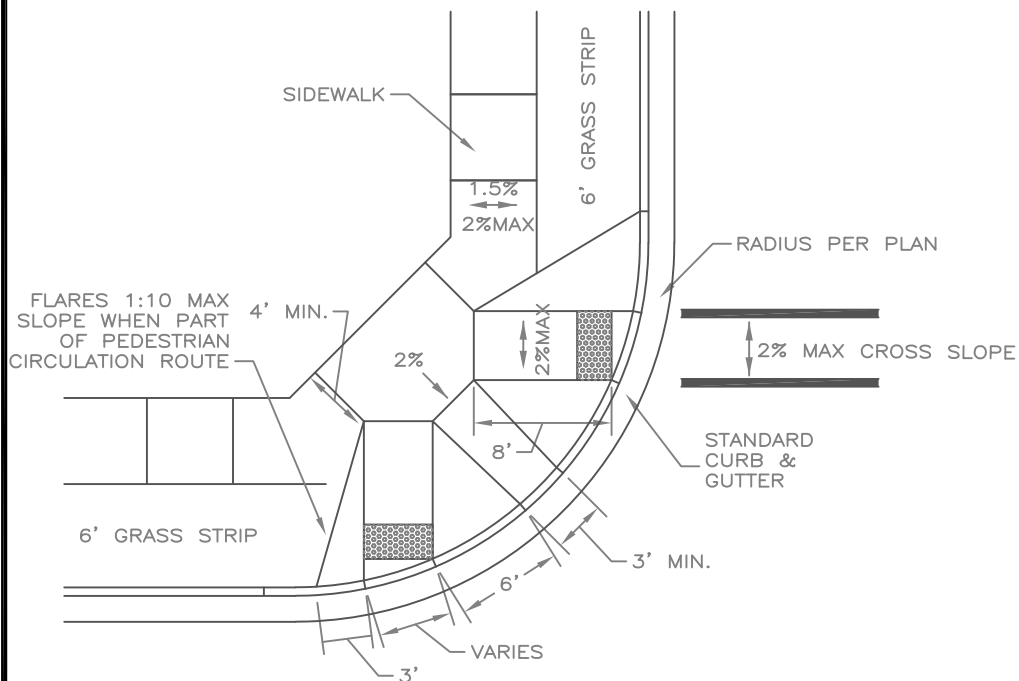

TYPE A
PLANTER STRIP APPLICATION

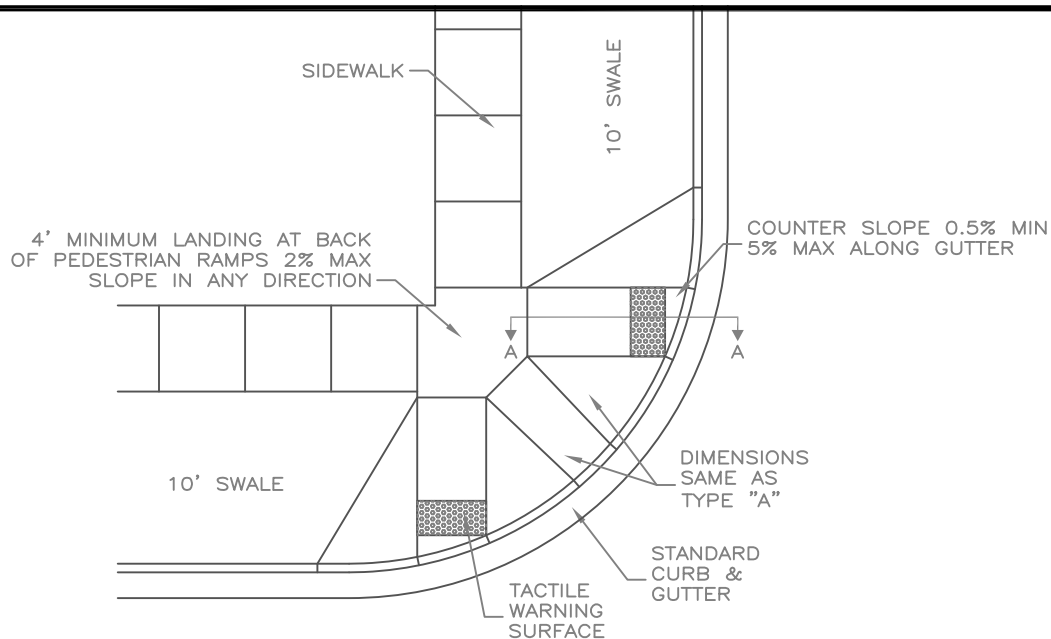

TYPE B
SWALE APPLICATION

NOTES:

1. CONFIGURATION OF RAMPS AND LOCATION OF TACTILE WARNING SYSTEM SHALL FOLLOW THE DETAILS SHOWN WITHIN THE PLANS.
2. TACTILE WARNING SURFACES CAST IRON UNITS AS MANUFACTURED BY ADVANTAGE CAST IRON OR TOUGH TILE. TRUNCATED DOME SIZE AND SPACING SHALL COMPLY WITH THE ACCESS BOARD GUIDELINES FOR PUBLIC RIGHTS-OF-WAY (SECTION R304). UNITS SHALL BE INSTALLED PER MANUFACTURERS RECOMMENDATIONS.
3. TACTILE WARNING SURFACES SHALL BE 24" MIN. IN THE DIRECTION OF TRAVEL AND EXTEND THE FULL WIDTH OF THE RAMP, EXCLUDING FLARES. RAMP WIDTH SHALL BE THE SAME WIDTH AS THE ADJACENT PEDESTRIAN FACILITY.
4. A 4' MINIMUM LANDING SHALL BE PROVIDED BEHIND ALL PEDESTRIAN RAMPS.
5. ALL WORK SHALL COMPLY WITH THE ACCESS BOARD GUIDELINES FOR PUBLIC RIGHTS-OF-WAY (SECTION R304). NO WORK OUTSIDE OF THE DESIGN TOLERANCES, CONTAINED IN SAID GUIDELINES, WILL BE EXCEPTED. MAXIMUM AND MINIMUM VALUES ARE ABSOLUTE.
6. THE CENTERLINE OF A RAMP SHALL BE GENERALLY ALIGNED TO DIRECT THE USER OF A RAMP TO THE RECEIVING RAMP.

APPROVED BY:

POST FALLS STANDARDS FOR PUBLIC WORKS CONSTRUCTION

[Signature] 3/19/19
CITY ENGINEER, P.E. DATE:

PEDESTRIAN RAMPS

STANDARD DRAWING
NO. SD 2013